

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
WO 2004/007268 A1

(51) International Patent Classification<sup>7</sup>: B62J 1/04, 1/00

(21) International Application Number:  
PCT/IT2003/000440

(22) International Filing Date: 16 July 2003 (16.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PI2002A000039 16 July 2002 (16.07.2002) IT

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: BERTELLONI, Pietro [IT/IT]; 24, Via Venezia, I-54100 Massa (IT).


Published:

— with international search report

(74) Agents: BARDINI, Marco, Luigi et al.; Società Italiana Brevetti S.p.A., Corso dei Tintori, 25, I-50122 Firenze (IT).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEAT FOR A TWO-WHEELED VEHICLE

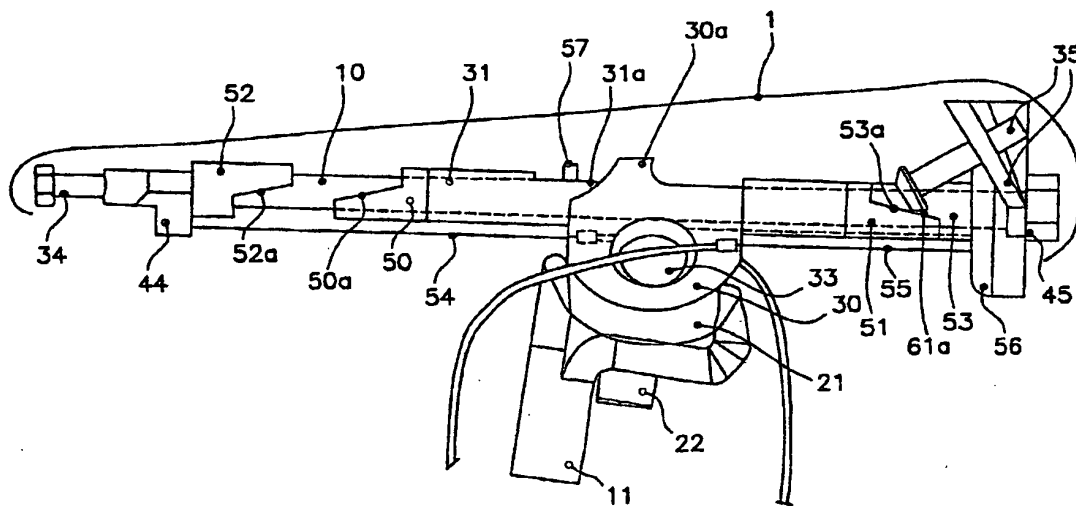

(57) **Abstract:** A seat for two-wheeled vehicles, such as bicycles, motorcycles and scooters, comprising a relatively soft saddle support (1) to bear the rider and a supporting structure (2, 3, 4 and 5) of the saddle support by means of which the support is connected to the seat-carrying upright (11) of the vehicle. Between the supporting structure and the upright of the vehicle there is provided a longitudinal pin (10) around whose longitudinal axis the relatively soft support can oscillate, whereas between the pin and the supporting structure there are provided means of blocking the oscillation of said pin. In particular, there are provided means for regulating the amplitude of the oscillation around the axis of the pin.